

~~CHAINS~~
FEET

1/4 COR.
12, 7
1. N. 5. + 6.

5276.7

SEC. COR
7, 12, 13, 18
1. N. 5. + 6.

Set an iron pipe 1 1/2 inches in diam., 3 ft. long, filled with charcoal, with an Oregon State Board of Forestry bronze cap stamped 1/4 S12, S7, 1949, 199

from which:

A cedar snag 23 inches in diameter bears S 71° E a distance of 27.2 feet. Scribed T1N R5W 1/4 S7, 199.

A fir snag 54 inches in diameter bears S 56° W a distance of 30.6 feet. Scribed R6W 1/4 S12 199.

The corner to Sections 7, 18, 12, 13 T1N R 5 & 6 W determined on retracement.



Restored the monument by setting an iron pipe 1 1/2 inches in diam., 3 ft. long, filled with charcoal, with an Oregon State Board of Forestry bronze cap stamped T1N R6W R5W S12, S7, S13, S18, 1949, 199

from which:

A fir snag 42 inches in diameter bears N 85° 30' E a distance of 23.5 ft., scribed T1N, R5W, S7, 199.

December 29, 1949

The above work done by Don Davis, Transitman, Bruce Thomas and Wayne Frank, Chainmen, Douglas Rogers, Flagman, under my direction.

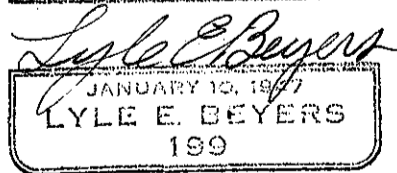

Lyle E. Beyers
Lyle E. Beyers
Forest Engineer