

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Closing Township corner common to Sections 31 and 6, T2-3N, R6W, W.M., Tillamook and Washington Counties, Oregon.

ORIGINAL

Stone 18"x12"x8", 6 notches on S and 6 notches on E edges, (found in place), from which a:

- 30" Fir bears N41 $\frac{1}{2}$ E 24.5 lks.; now 31" stump, scribes S31 visible, BT face covered, true distance 9.5 lks.
- 24" Hem bears S37E 9.5 lks.; now 27" slabbed stump in place, log downhill with scribes T2N R6W BT, true distance 22 lks.
- 20" Hem bears N79 $\frac{1}{2}$ W 29 lks.; now 21" snag, scribes T3N R6W S31 T2N R6W S6 CC visible, true distance 16 lks.

RESTORED


Set 3"x4"x72" white painted Cedar post 1.5 ft. NW of corner stone, from which a:

- 6" Fir bears N18E 31.0 ft.; scribed T3N R6W S31 BT.
- 21" Fir stub 10 ft. high bears S70E 29.8 ft.; scribed T2N R6W S6 BT RE2311.

Oregon State Board of Forestry metal location poster on 6" Hem N66 $\frac{1}{2}$ W 6.0 ft.

Dated July 13, 1955.

Restored by Arnold G. Gibson under my direction
 Arnold G. Gibson, Asst. Engr.

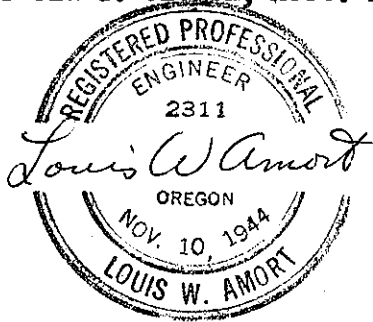

Present and witnessed by Robert Sturm