

CHAINS

ESTABLISHED CORNER FOR OREGON STATE BOARD OF FORESTRY

(see official plat)

Northeast one-sixteenth corner common to Section 4, Township 1 North, Range 7 West, W.M., Tillamook County, Oregon.

As corner point falls in proposed road did not set pipe, but referenced point as follows:

1 1/2" x 40" galvanized iron pipe with 3" bronze cap N89°00'22"W 45.0 ft.; marked OSBF RM NE 1/16 → 1953 2311, 36 inches in ground, in mound of stone.

60" Broken Fir stump bears N17°30'E 374.2 ft.; scribed NE 1/16 S4 BT.


36" Fir stump bears N62°30'W 61.3 ft.; scribed NE 1/16 S4 BT RE 2311.

Oregon State Board of Forestry metal location poster on 36" Fir stump BT.

Oregon State Board of Forestry metal location poster on 4" x 4" x 6' white cedar post 1.2 ft. NE of RM.

Dated August 5, 1953.

Set by Arnold G. Gibson under my direction.  
 Arnold G. Gibson, Assistant Engineer

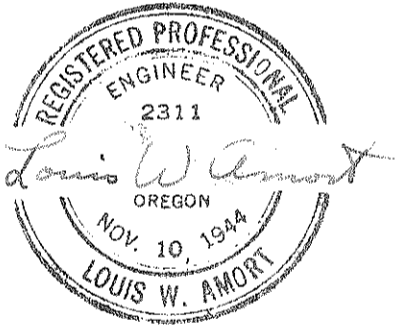

Present and witnessed by Carl Vold.