

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Closing corner common to sections 5 and 6, Townships 2 & 3 South, Range 7 West, W.M., Tillamook County, Oregon.

ORIGINAL

15" x 12" x 10" basalt stone, now missing, from which a:

- 12" Hemlock bears S32E 41 lks; now missing.
- 18" Hemlock bears S21°30'W 55 lks; now 18" stub 5' high, exposed scribe marks T3 W.
- 24" Hemlock bears N50W 13 lks; now missing.

RESTORED CORNER AND BEARING TREES


Set 1½" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY T2S R7W S31 S6 S5 T3S R7W CC 1952 2311," 2½" in ground. Raised mound of stone around corner pipe, from which a:

- 60" Fir snag bears N12W 5.8'; scribed T3S R7W CC S5 S6 BT RE 2311.
- 55" Fir stump bears S08°30'W 57.9'; scribed T3S R7W S6 BT.
- 61" Fir stump bears S62E 87.2'; scribed T3S R7W S5 BT.

Placed an Oregon State Board of Forestry metal location poster on 60" Fir snag BT and marked it: Sec 31 T2S R7W CC 5 & 6 5.8 Ft. S12E.

Dated May 21, 1952.

This corner was restored by Don D. Davis under my direction. Don D. Davis Assistant Forest Engineer

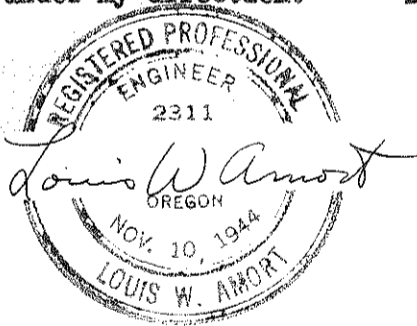

Present and witnessed by Richard A. Morris Richard A. Morris Compassman

Present and witnessed by Robert A. Young Robert A. Young Chairman