

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

One-quarter corner common to sections 29 and 32, Township 3 North, Range 8 West, W.M., Tillamook County, Oregon

ORIGINAL

12" Hemlock, now 14" stub 5' high, scribe marks 1/4 S exposed on north side and 4 on south side, from which a:

8" Hemlock bears N30°W 18 lks.; now 9" stub 20' high (N30W 9.5'), parts of scribe marks exposed on burnt face.

16" Hemlock bears S80°E 23 lks.; now root stub.

REFERENCED AND WITNESSED CORNER POINT

As a reference monument

Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY R.M. 1/4 S29 S32 5 Ft. E. 1953 2311," 2 1/2' in ground 5 feet west of corner. Raised mound of stone around reference monument pipe.

84" Fir stump bears N60W 11.8' from corner; scribed 1/4 S29 BT.

71" Fir stump bears S31°30'W 52.6' from corner; scribed 1/4 S32 BT RE 2311.


Placed an Oregon State Board of Forestry metal location poster on 71" Fir stump BT and marked it: Sec 32 T3N R8W Sec Cor 52.6 Ft. N31°30'E.

Dated January 6, 1953.

This corner was restored by

Don D. Davis  
Don D. Davis Assistant Forest Engineer

under my direction.

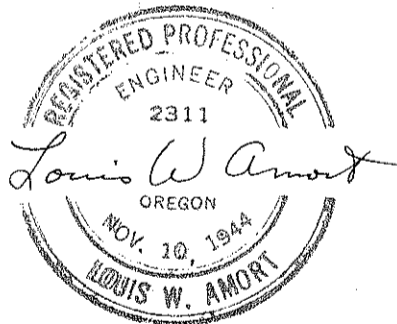

Present and witnessed by Robert A. Young, Compassman

Robert J. Cowan, Chairman.