

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Section corner common to sections 30 and 31, T1N R6W, W.M., Tillamook County, Oregon.

ORIGINAL

Stone 15"x12"x6", in place, marked with 5 notches on N edge, and one notch on S edge, from which a:

See below for new BTs. (No originals)

RESTORED

Set 1 1/2"x36" galvanized iron pipe with 3" bronze cap marked "Oregon State Board of Forestry T1N R7W S25 T1N S30 S31 R6W 1953 2311", 30" in ground, on N edge of corner stone, in mound of stone, and from which a:


24" Fir bears N33E 3.7ft.; scribed T1N R6W S30 BT.

40" Fir bears S33 1/2 E 50.7ft.; scribed T1N R6W S31 RE 2311 BT.

Placed an Oregon State Board of Forestry metal location poster on 24" Fir BT.

Dated March 19, 1953.

Restored by David D. Davis under my direction.
D. Davis, Assis. For. Eng.

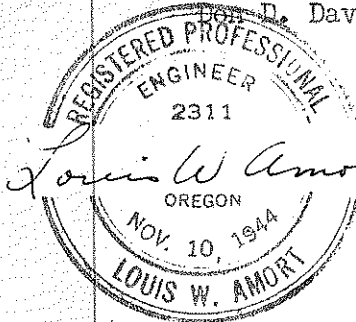

Present and witnessed by Robert J. Cowan.