

CHAINS

ESTABLISHED CORNERS FOR OREGON STATE BOARD OF FORESTRY  
(See official plat)

South one-sixteenth corner common to Sections 25 and 30,  
T. 3S, Rgs. 9 and 10 W., W.M., Tillamook County, Oregon.

ESTABLISHED Var.  $21\frac{1}{2}^{\circ}$ E

Set  $1\frac{1}{2}$ " x 36" galvanized iron pipe with 3" bronze cap  
marked "OREGON STATE BOARD OF FORESTRY S1/16 S25 S30  
1957 RS 359," 35 inches in ground, and from which a:

31" Fir bears  $N84^{\circ}W$  39.9 ft.; scribed S1/16 S25 BT RS 359.  
32" Hem. bears  $N56^{\circ}E$  22.9 ft.; scribed S1/16 S30 BT.

Oregon State Board of Forestry metal location poster on  
32" Hemlock BT.

Set 4"x4"x60" white painted Cedar post 2.0' SE of pipe.

Center South one-sixteenth corner in Section 30,  
T3S, R9W, W.M., Tillamook County, Oregon.

ESTABLISHED Var.  $21\frac{1}{2}^{\circ}$ E

Set  $1\frac{1}{2}$ " x 36" galvanized iron pipe with 3" bronze cap  
marked "OREGON STATE BOARD OF FORESTRY S1/16 C-C  
S30 1957 RS 359," 33 inches in ground, and from which a:

1"x23" iron rod bears  $N89^{\circ}E$  10.0 ft.; 19" in ground  
and 1.0 ft. N of E.W. fence line.


$1\frac{1}{4}$ "x24" iron rod bears  $S89^{\circ}W$  10.0 ft.; 19" in ground  
and 1.0 ft. S of E.W. fence line

Oregon State Board of Forestry metal location poster on  
fence post 1.0 ft. S  $53^{\circ}W$ .

Set 4"x4"x60" white painted Cedar post 2.0 ft. E of pipe.

Dated February 21, 1957.

Established by Richard Morris under my direction.  
Richard Morris, Transitman

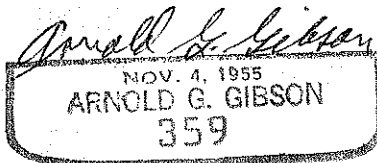

Present and witnessed by Lloyd Geraths  
Robert Sturm

BOOK 2