

Feet

1287.2 CN 1/16th, found a scribed 4" x 4" x 48" wooden post, as set by Carlich, for the corner from which

A spruce 37 inches in diameter bears N 0-3/4 E 17.8 feet

A spruce 27 inches in diameter bears S 85 1/2 E 19.6 feet

At the corner point set in the ground a 2" x 30" iron post with brass cap marked

T 5 S R 10 W

CN 1/16

1963

ORLS 650

Deposited the wooden post alongside iron post

From the CN 1/16, as described, running west along random transit line describing true line which bears N 88-54-14 W

597.1 Approximate location branch, course north

1335.7 Point for the NW 1/16th, This fell on a root of a 33 inch hemlock. Set a PK nail in the root for the corner point from which

A hemlock 33 inches in diameter bears S 76 3/4 W 22.4 feet
Scribed NW 1/16 S 21 BT 650

A hemlock 36 inches in diameter bears S 87 1/2 E 22.8 feet
Scribed NW 1/16 S 21 BT 650

In addition to the above, set in the ground west on line N 88-54-14 W at 10 feet distance, a 2" x 30" iron post with brass cap, for a witness corner, marked


T 5 S R 10 W

NW 1/16

WC

1963

ORLS 650

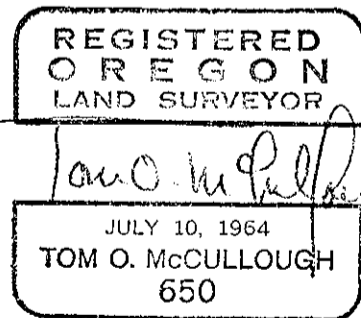

Continuing N 88-54-14 W

2673.7 N 1/16 between Sections 20, 21, found a 1 1/2" x 60" iron pipe, as set by Carlich, for the corner from which

A spruce 41 inches in diameter bears N 20 E 30.8 feet

A spruce 32 inches in diameter bears S 12 W 18.5 feet

At the corner point set in the ground a 2" x 30" iron