

feet

post with brass cap marked

T 5 S R 10 W

N 1/16

20 | 21

1968

ORLS 650

from which new bearing trees:

A spruce stump 44 inches in diameter bears N 57 E 60.7 feet  
Scribed 1/16 S 21 BT 650

A fir 33 inches in diameter bears S 68 3/4 E 16.9 feet  
Scribed 1/16 S 21 BT 650

Deposited iron pipe alongside iron post

From the C 1/4 corner Section 21, previously described,  
running east on random transit line describing true line  
which bears S 89-14-14 E

- 770.0 Approximate location road, north-south
  - 1172.0 Approximate location creek 10 feet wide course N 10 E
  - 1245.0 Ascend
  - 2781.3 1/4 corner between 21, 22. Found 4" x 4" x 48" scribed  
wooden post for corner from which
    - A spruce 34 inches in diameter bears N 56 W 9.8 feet
    - A fir stump 35 inches in diameter bears N 39 1/2 E 47.2 feet
- At the corner point set in the ground a 2" x 30" iron  
post with brass cap marked


T 5 S R 10 W

1/4

21 | 22

1968

ORLS 650

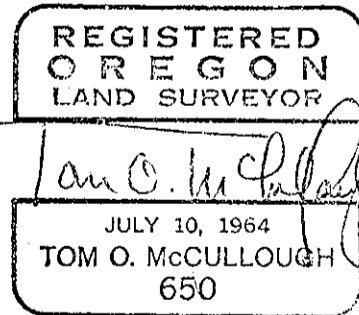

from which a new bearing tree:

A spruce 24 inches in diameter bears S 50 3/4 E 18.1 feet  
Scribed 1/4 S 22 BT 650

Deposited wooden post alongside iron post

Return to the CS 1/16th and ran west along random transit  
line describing true line which bears N 88-34-14 E