


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner was established by C.J. Handley in 1873 under G. L. O. Contract No. 183. Handley set a post for the 1/4 Section corner from which a Alder 6 inches diameter bears S 6° E 50 Lks. A Alder 8 inches deameter bears N 10° W 43 Lks. The Tillamook County Survey Records; Book 4, Page 27; report that W.L. Coates, E.J. Parish, and H.V. Alley were at this corner; but the records do not give a date. The records also list the following bearing trees, but they do not say weather Coates set these trees or found them: 12 in. Alder North 8.7 ft., 18 in Alder S76° 00' W 16.5 ft., and 18 in. Spruce S80° 00' E 67.8 ft. In April of 1922 and in December of 1944 Coates completed and recorded surveys on which he shows ties to this corner. (See maps B-166 and A-42, and field notes of "Survey for Geo Riechers, Dec. 14, 1944" by W.S. Coates; County Survey Records.) In June of 1955 W.A. Markham, P.E. Engineer No. 1842, made a survey of the Range line between Ranges 9 and 10 West, T 3N, W.M. On

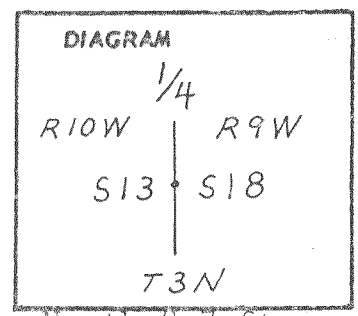

Description of corner evidence found:

this survey Markham reports that he found a stone and iron rod at the position he used for the 1/4 corner between Sections 13 and 18.

I could not find any original evidence of this corner, nor could I find any of the trees reported by Coates in BK. 4, PG. 27, Survey Records. Using Coates' field notes and surveys as heretofore described I have verified that a 1 1/4 inch iron rod marks the corner position reported by Coates. On the N.E. side of said iron rod I found a large stone with a "1/4" scribed on its bottom face. The Iron rod is at the intersection of two old fence lines; one fence runs East and West, and the other fence runs South from said iron rod. From the iron rod I measured N89° 06' E 764.3 ft. to the S.W. corner of the old Crawford property, said corner being marked by old fence lines. I also measured N89° 10' E 970 Ft. to the apparent center line of the old Coast Highway. Coates' respective measurements were N 88° 32' E 765.4 ft. and N 88° 32' E 970 ft. The Iron rod and stone also verify the position used by Markham in 1955.

Description of monument and accessories I established to perpetuate the original location of this corner

I am accepting the iron rod monument as marking the position of the 1/4 corner as found and recorded by Coates, a Registered Engineer and one time County Surveyor, since 1922, and also found by Markham in 1955. At present this corner stands on reputation evidence only.

I hereby certify that I found and verified the above corner monument position as herein described between the time period of Oct. 1974 and Nov. 1974.

REGISTERED PROFESSIONAL LAND SURVEYOR

Karl F. Foeste

OREGON
JULY 12, 1968
KARL F. FOESTE
0849

Witnesses: *Doreen Vamitja*
Allen Hofmann

Office of..... Surveyor..... County of..... Tillamook.....
State of..... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the..... day of.....
BOOK 5..... by..... (COUNTY OFFICIAL) 313 (DEPUTY) *Book 5*

PR 313