

REWITNESSED CORNER FOR STATE OF OREGON - DEPARTMENT OF FORESTRY

One quarter corner common to Sections 13 and 14, T2S, R7W, W.M.,
Tillamook County, Oregon.

ORIGINAL by Albert P. Wilson, June 26, 1891.

Post; missing.

10" Hemlock bears N65°E 43 lks; now remains of root system in
place.

13" Hemlock bears S30°E 51 lks; missing.

RESTORATION by Louis W. Amort RE2311, January 20, 1953, (Book
2, Page 250, Tillamook County Records).

1 1/2"x36" galvanized iron pipe with 3" bronze cap, in mound
of rock; found in place.

42"x30 ft. Fir stub bears S56°W 38.4 ft.; now a 42" badly
burnt stump with scribes 1/4 S RE2311 BT visible. Distance
is 46.6 ft. to face, 48.4 ft. to center of stump.

60" Fir stump bears S45 1/2°E 57.4 ft.; now 60" with scribes
1/4 S BT visible. Distance is 56.7 ft. to face, 59.4 ft. to
center of stump.

REWITNESSED

Var. 21 1/2°E

From above pipe with marks "LS1998 1987" added, and from which a:

12" Fir bears S85°E 6.7 ft. to face; scribed 1/4S13BT.



16" Fir bears N03°W 36.0 ft. to face; scribed 1/4S14BT.

Metal location poster on new BTs.

Also poster on 42" Fir stump BT.

Dated June 9, 1987.

Rewitnessed by

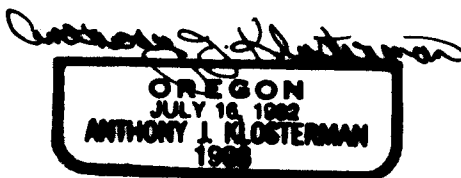

Present and witnessed Clifford R. Foster

BOOK 6

830