

CORNER INVESTIGATION REPORT

FS INDEX ID: S-5

CORNER: NORTH 1/16  
TOWNSHIP: 3S  
RANGE: 8W  
SECTION: 29 & 30  
MERIDIAN: WILLAMETTE

GCDB ID: 200260  
STATE: OREGON  
COUNTY: TILLAMOOK  
FOREST: SIUSLAW  
DISTRICT: HEBO

DATE: 3/3/2017

HISTORY OF VISITATIONS:  
1978 - K.F. FOESTE, CSF# B-802  
1979 - H.L. RICKS, CSF# B-826  
1991 - D.H. KELLOW, CSF# B-1530  
1993 - D.H. KELLOW, CSF# B-1649  
2003 - T.L. JONES, CSF# B-2695

NFSL PROPERTY BOUNDARY CORNER?:  YES  NO

LINE(S) POSTED: NORTH - 1978 EAST - 1978

MAINTAINED: NORTH - 1986 EAST - 2017

GUARD POST(S): NORTH - 2.7 FT EAST - 2.4 FT

CORNER HISTORY:

- (1978) - ESTABLISHED CORNER BY PROPORTION BY SURVEY, SETS GALVANIZED IRON PIPE WITH A BRASS CAP & 2 BT'S.
- (1979) - FOUND MONUMENT & BT'S PER CSF# B-802
- (1991 & 1993) - FOUND BRASS CAP ON LP.
- (2003) - FOUND GALVANIZED IRON PIPE WITH BRASS CAP & 2 BT'S.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Jonathan B. Drew II*

OREGON  
REGISTERED  
JONATHAN B. DREW II  
89396

EXPIRES: 12/31/2017

MONUMENT FOUND/SET:

FOUND A 1-1/4" GALVANIZED IRON PIPE WITH A 2-1/2" BRASS CAP, FLUSH WITH THE GROUND.

RECORD MEASUREMENTS:

(N47°E - 11.2 FT TO FACE)1978  
(N88°W - 19.3 FT TO FACE)1978

RECORD CORNER ACCESSORIES:

AN INDETERMINATE SIZE FIR STUMP WITH NO MARKS VISIBLE.  
A 27" FIR STUMP WITH A HEALED SINGLE BLAZE.

NEW CORNER ACCESSORIES:

A 6" FIR BEARS, S81°W - 3.7 FT, MARKED "X"BT" ON A DOUBLE BLAZE.  
A 7" FIR BEARS, N18°30'E - 13.4 FT, MARKED "N1/16S29"BT" ON A DOUBLE BLAZE.

METHOD OF MEASUREMENT:


NO NEW MEASUREMENTS MADE TO REMAINS OF EXISTING BT'S. BEARINGS TO NEW BT'S BY STAFF COMPASS, SET AT 15° E DECLINATION, TO CENTER OF TREE. DISTANCES BY STEEL TAPE TO AN ALUMINUM NAIL SET AT SIDE CENTER.

NEW BT'S INCLUDE A 3/4" BRASS WASHER MARKED "OR PXL8 89396" NAILED FLUSH IN THE LOWER BLAZE BETWEEN THE "B" & "T" SCRIBE MARKS.

CORNER MAINTENANCE/OTHER INFO:

CLEAR BRUSH FROM AROUND MONUMENT & TO BT'S, BT FACES & A 6" BAND AT HEAD HEIGHT PAINTED RED. ADD NEW NAILS TO BT TAGS & ADD NEW TAGS WHERE NEEDED. MONUMENT SIZES ARE OUTSIDE DIAMETER & BT DIAMETERS ARE AT BREST HEIGHT. NO PAINT ADDED TO BT'S DUE TO PROXIMITY TO NEARBY RESIDENCE.

CAP DIAGRAM:

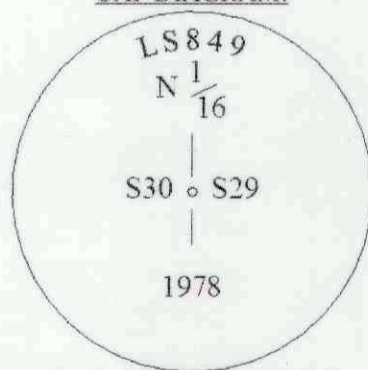

GEODETIC COORDINATES:

LATITUDE: N 45° 17.006'  
LONGITUDE: W 123° 42.390'  
ELLIPSOID HEIGHT:  
DATUM: WGS 84

DOCUMENTS ON FILE AT:

3106 PIERCE PARKWAY, STE D  
SPRINGFIELD OREGON, 97477  
PHONE: (541)-225-6474

SOURCE: CONSUMER GRADE GPS, FOR NAVIGATION TO CORNER.

DATE OF INVESTIGATION: 3/1/2017

REPORT BY: JONATHAN B. DREW II, PLS# 89396, CFedS# 1664

ASSISTED BY: ANDREW HILLMAN, SURVEY TECH  
JACOB HUNT, SURVEY TECH.

THIS DOCUMENT FILED IN CS OFFICE: YES  
OTHER DOCUMENT FILED WITH CS: NONE

