

CHAINS

ESTABLISHED CORNERS FOR OREGON STATE BOARD OF FORESTRY

North One Sixteenth corner common to Sections 8 and 9, T. 3S.,
R. 7W., W.M., Tillamook County, Oregon.

ESTABLISHED Var. 21-1/2° E.

Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked
"OREGON STATE BOARD OF FORESTRY N 1/16 S8 S9 1957 RS359,"
34 inches in ground, and from which a:

26" fir bears S. 9° E. 18.8 ft.; scribed N 1/16 S9 BT RS359.

27" fir bears N. 31° W. 42.5 ft.; scribed N 1/16 S8 BT.

Oregon State Board of Forestry metal location poster on 26" Fir BT.
Set 4" x 4" x 60" white painted Cedar post 1.0' S.E. of pipe.

Center North One Sixteenth corner common to Section 8, T. 3S.,
R. 7W., W.M., Tillamook County, Oregon

ESTABLISHED Var. 21-1/2° E.

Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked
"OREGON STATE BOARD OF FORESTRY N 1/16 C---C S8 1957 RS359,"
35 inches in ground, and from which a:



50" Cedar snag bears S. 18° E. 11.8 ft.; scribed CN 1/16
S8 BT.

27" Cedar snag bears N. 46° W. 34.9 ft.; scribed CN 1/16
S8 BT RS359.

Oregon State Board of Forestry metal location poster on 50"
Cedar snag BT. Set 4" x 4" x 60" white painted Cedar
post 1.0' S.E. of pipe

Dated April 24, 1957

Established by Richard Morris under my direction.
Richard Morris, Transitman

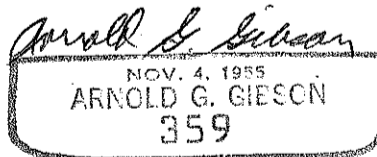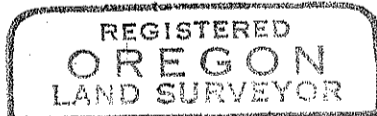

Present and witnessed by Lloyd Geraths